
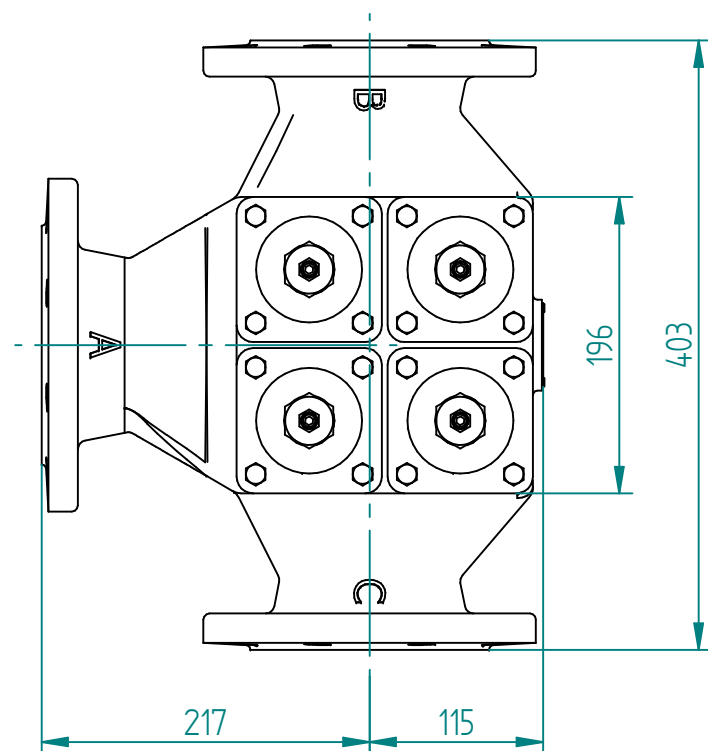
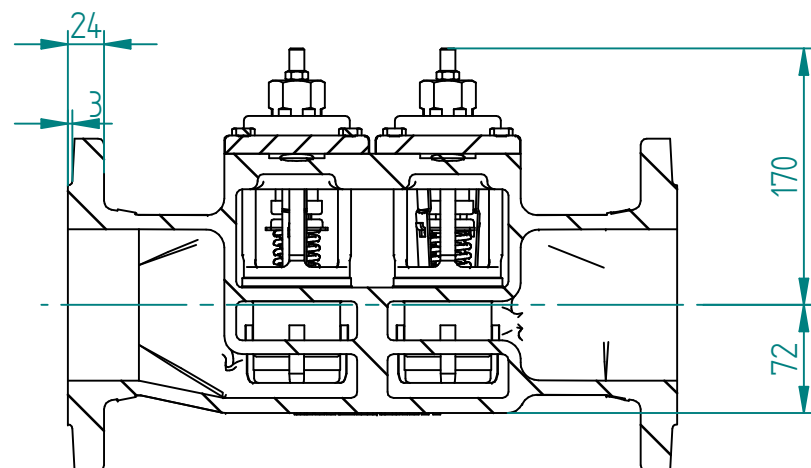


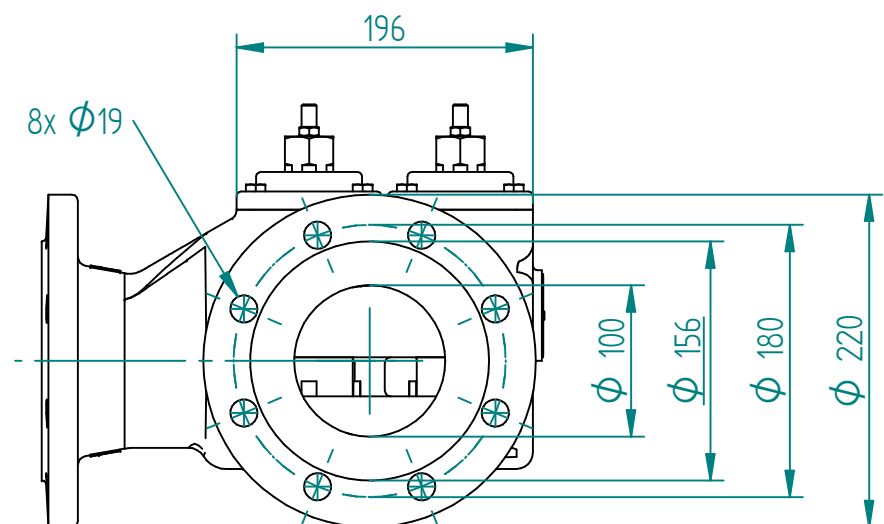

Technical Data:

Material:

- Body

EN-GJL-250

- Inner Parts

SS / Brass

Thermostat

237.0120-xxx-0

Sealing Kit

NBR

Operating Pressure

up to 16 bar

adm. Differential Pressure

up to 16 bar

Nominal Pressure

PN 16

Connection


Flange EN 1092-2
form B

Deliverable temperature ranges				
05 -15 °C	35 - 43 °C	57 - 66 °C	74 - 82 °C	93 -103 °C*
14 - 26 °C	37 - 47 °C	60 - 69 °C	77 - 85 °C	102-113 °C*
20 - 30 °C	39 - 50 °C	62 - 71 °C	79 - 88 °C	
27 - 37 °C	43 - 54 °C	66 - 74 °C	82 - 93 °C	
29 - 40 °C	51 - 60 °C	68 - 78 °C	85 - 96 °C*	
32 - 41 °C	54 - 63 °C	71 - 79 °C	88 - 99 °C*	

Max. continuous temperature 25 °C above fully open temperature.

*maximal operating temperature 120 °C

KVs [m ³ /h]	156.70
-------------------------	--------

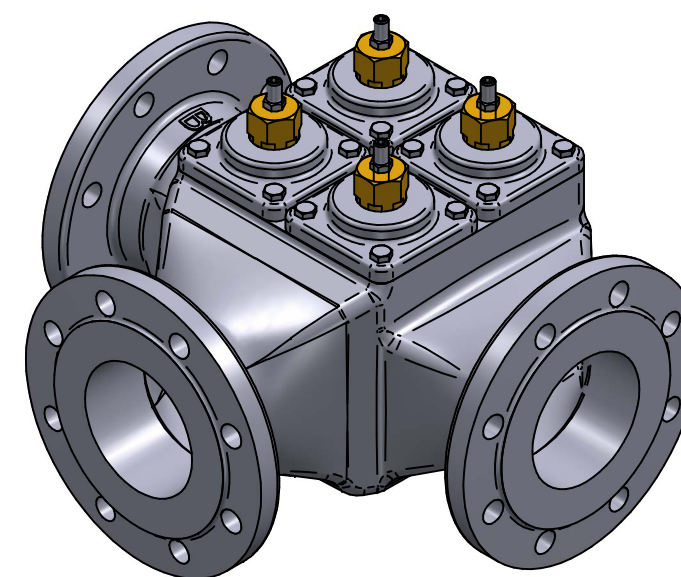

		NAME	DATE	SIZE	DWG NO		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE +/-0,5
	DRAWN	EMLA	03.01.2024	A3	AKO-226.0121-100-0		
	CHECKED	RAGA	02.02.2024	FILE NAME: 226.0121-100-0.dft			
TITLE 3-VEIS TEMP.REG.KONTR.VENTIL	ENG APPR	TOCO	dd.mm.yyyy	SCALE: 1:5		REV: 00	
	MGR APPR	TOCO	dd.mm.yyyy	WEIGHT: 43 kg		SHEET: 00	

00	ISSUED	02.02.2024	TOBE
REV	DESCRIPTION	DATE	APPROVED
REVISION HISTORY			