

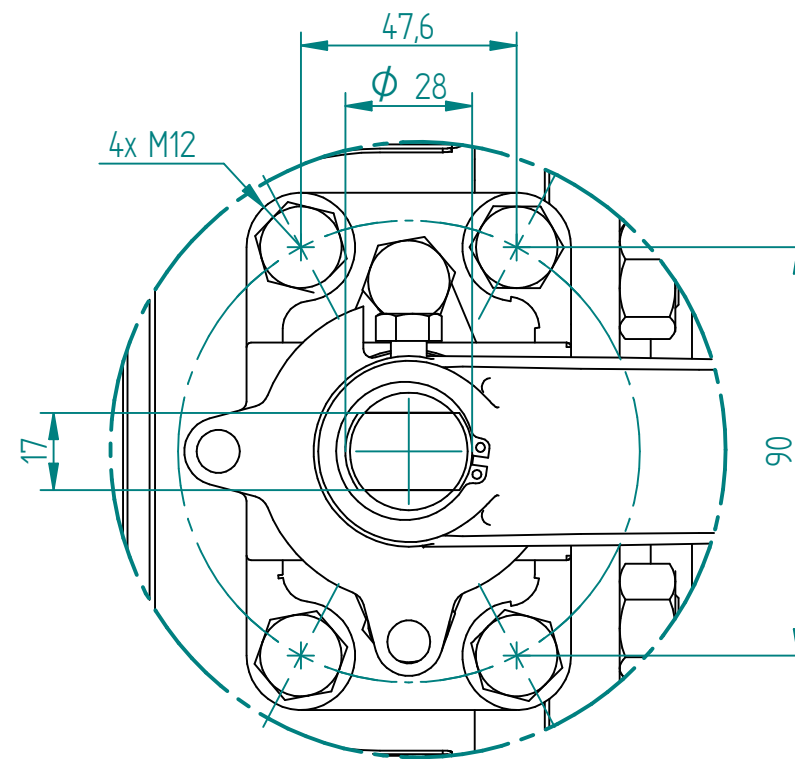
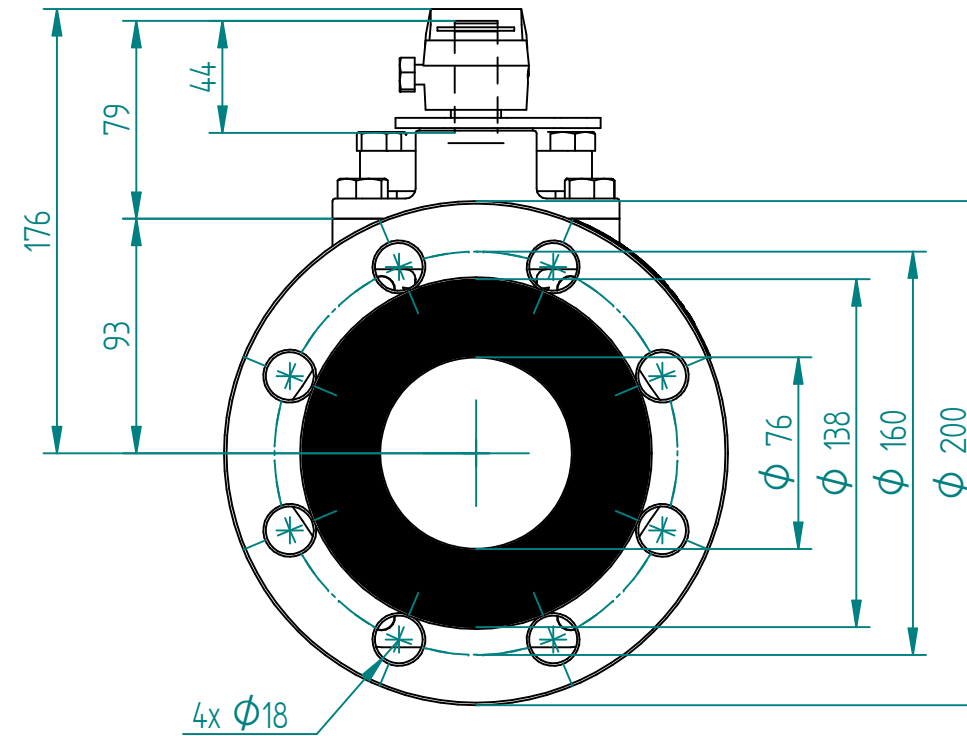


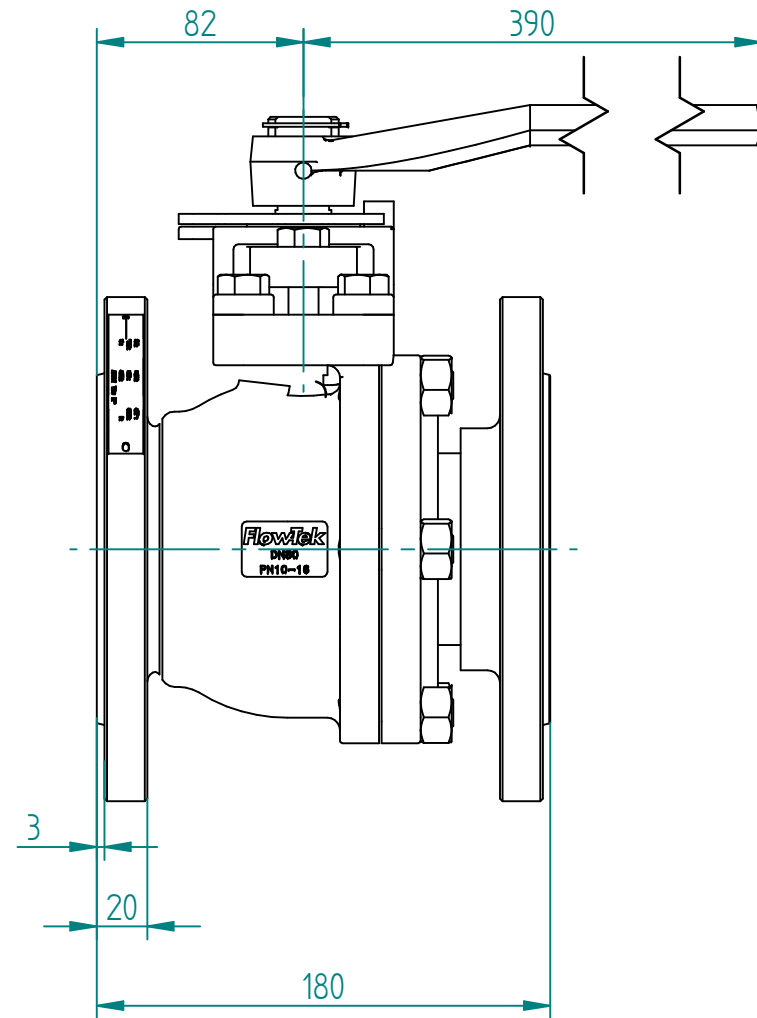

DETAIL A

Part name	Material
Body	EN 1.4408
Seat	TFM1600
Ball	EN 1.4401
Body Stud	A2-70 / SS304
Body Nut	A2-70 / SS304
Stem	EN 1.4401
Thrust Washer Protector	PEEK
Thrust Washer	Tek-Fil
Stem Bearing	15% RPTFE
Stem Packing	Graphite
Packing Protector	PEEK
Packing Gland	EN 1.4301 / SS304
Packing Follower	En 1.4408
Gland Bolt	A2-70 / SS304
Travel Stop Housing	EN 1.4408
Housing Bolt	A2-70 / SS304
Travel Stop Plate	A2-70 / SS304
Snap Ring	SS304
Handle	Ductile Iron
Handle Bolt	Carbon Steel
Stainless Steel with Lever DN65-DN300	

KV	Torque
995	73 nm

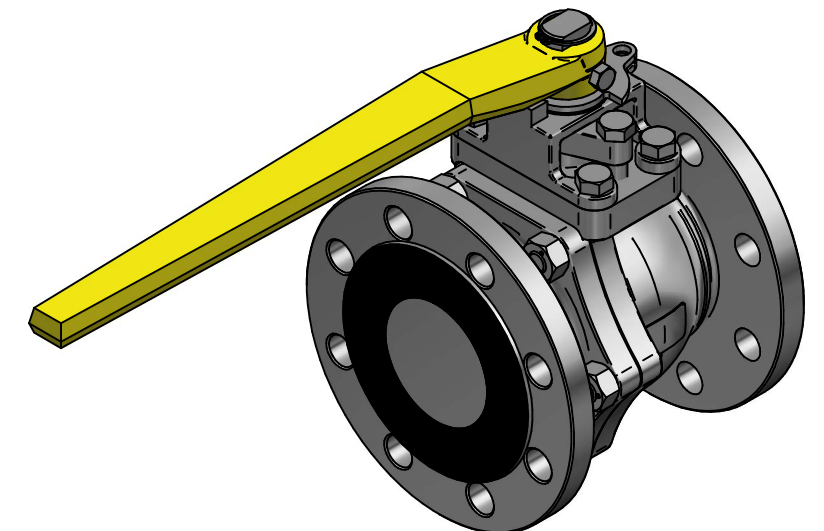

		NAME	DATE	SIZE	DWG NO		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE +/-0,5
	DRAWN	EMLA	28.12.2023	A3	BRA00008		
	CHECKED	EMLA	28.12.2023	FILE NAME: BRA00008.dft			
TITLE 2PC BALL VALVE F15-4YJG PN16 DN80 FLANGED F-BORE FLOATING 316/316/TFM 90X47.6 DD17X28 FIRESAFE W/LEVER DIN3202-F4 L-180MM	ENG APPR			SCALE: 1:3		REV: 01	
	MGR APPR			WEIGHT: 17.5 kg		SHEET: 1 OF 1	

TITLE 2PC BALL VALVE F15-4YJG PN16 DN80 FLANGED
F-BORE FLOATING 316/316/TFM 90X47.6 DD17X28
FIRESAFE W/LEVER DIN3202-F4 L-180MM

REV	DESCRIPTION	DATE	APPROVED
01	ADDED LEVER	28.08.2024	EMLA
00	ISSUED	12.07.2024	EMLA
REVISION HISTORY			