


2-Way self-closing globe valves Fig.695

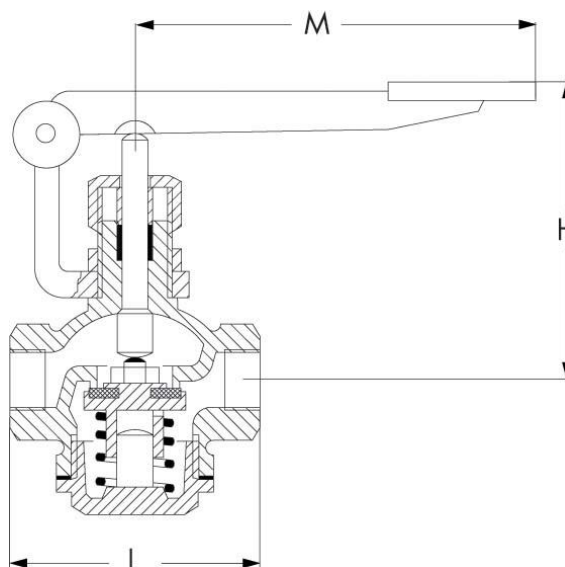

DN	DN	L	H	M	Weight	Pressure and Temp Range
["]	[mm]				[kg]	
½	15	60	85	130	0,73	6bar 0/120 °C
¾	20	70	95	130	0,85	6bar 0/120 °C
1	25	80	105	130	1,15	6bar 0/120 °C
1 ¼	32	96	135	160	1,55	6bar 0/120 °C
1 ½	40	104	140	160	1,85	6bar 0/120 °C
2	50	130	150	160	2,85	6bar 0/120 °C

	½"	¾"	1"	1 ¼"	1 ½"	2"
Body material	Bronze	+	+	+	+	+
Connection 1	Gas inner thread cylindrical (BSPP)	+	+	+	+	+
Pressure rating	PN 6	+	+	+	+	+
Operation	Lever	+	+	+	+	+
Disc version	Fixed valve	+	+	+	+	+
Sealing	PTFE	+	+	+	+	+
Version	Globe valve	+	+	+	+	+
Stem seal (primary)	PTFE	+		+	+	+
Bonnet type	Screwed	+		+	+	+
Material quality	Bronze (Rg 5)	+	+	+	+	+
Self-locking	Yes	+	+	+	+	+
Bellows seal	No	+	+	+	+	+