

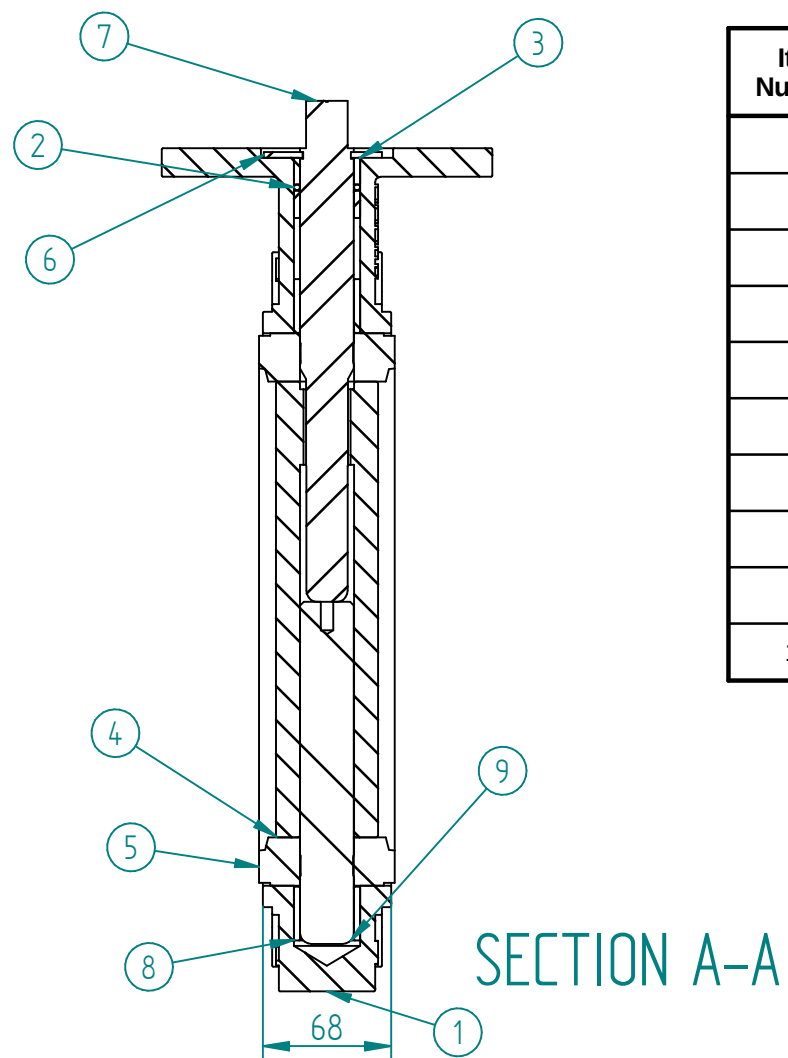
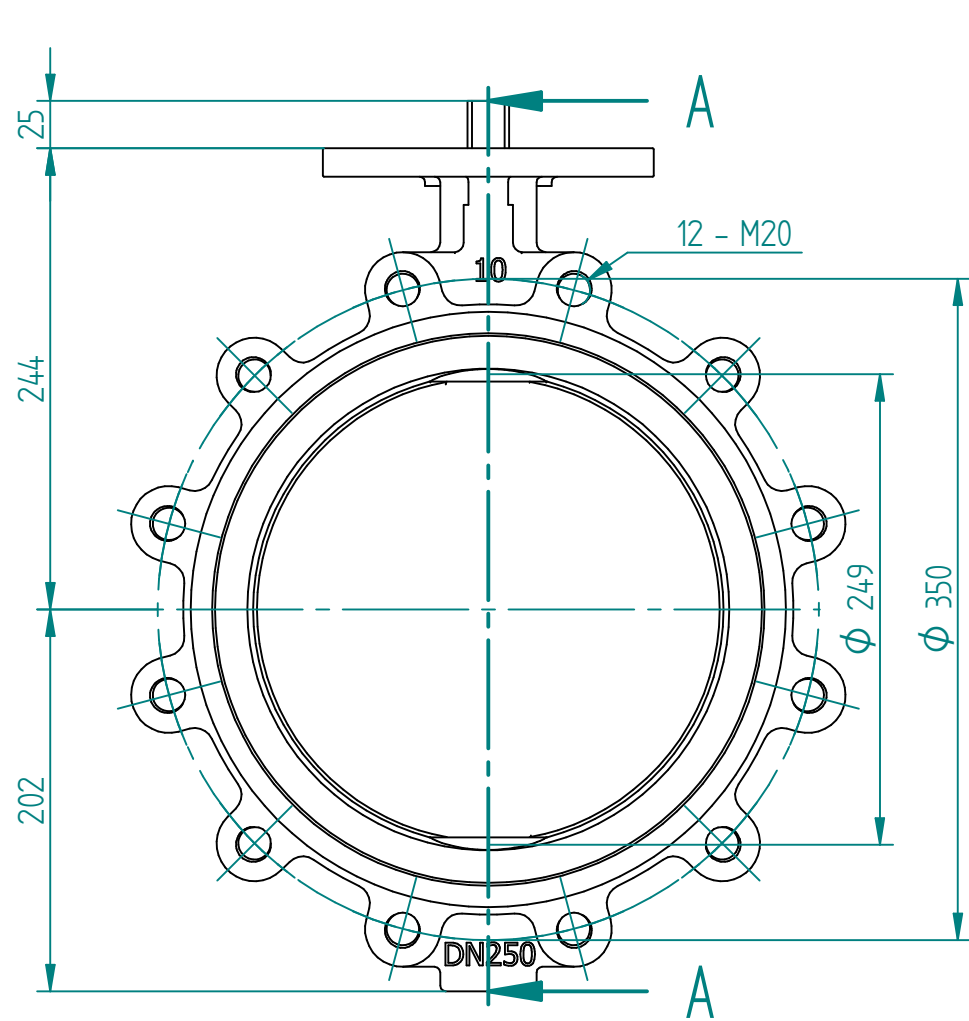
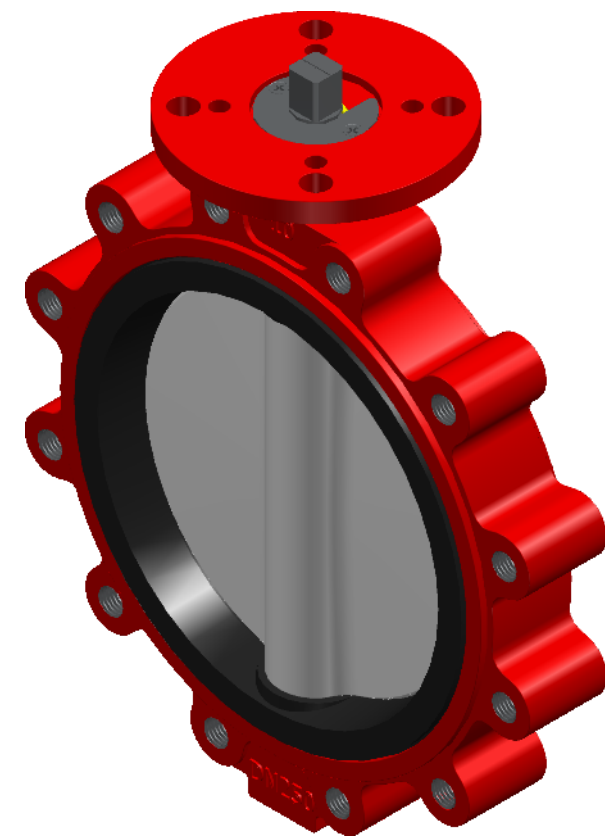


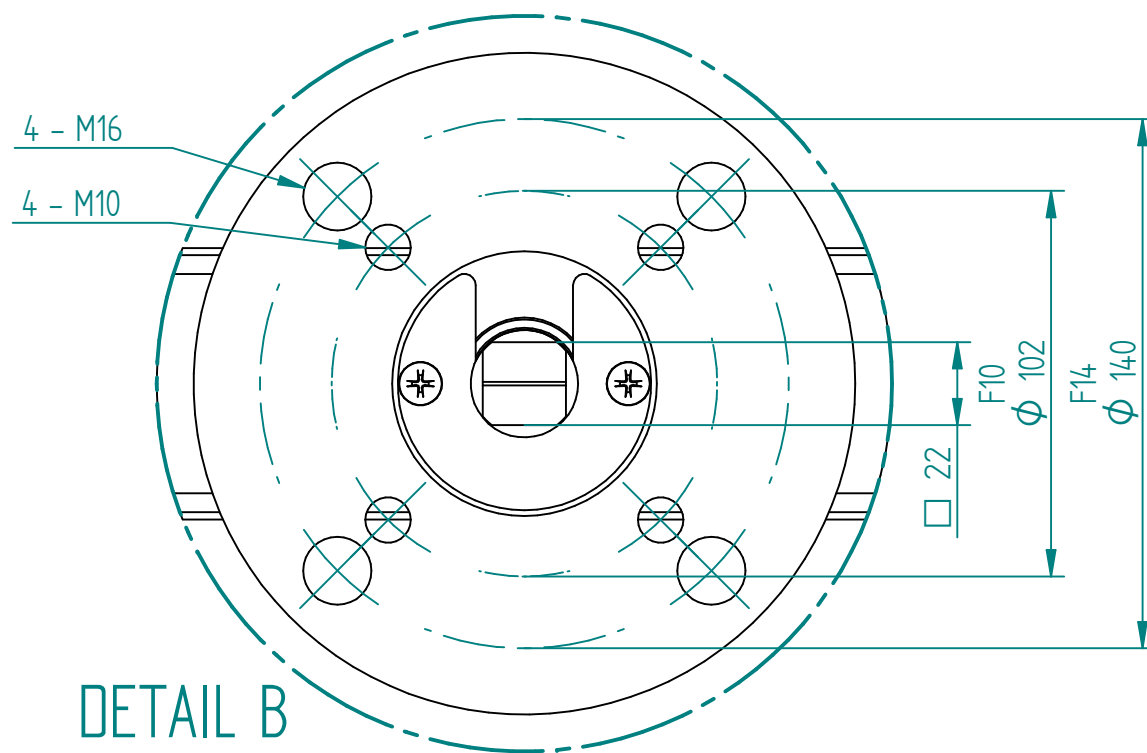

Item Number	File Name	Material	Quantity
1	Body	Iron:0.7040 , EN-GJS-400-15 C5-M Coated	1
2	O-Ring	NBR (Nitrile Butadiene Rubber)	1
3	Short-Bushing	PTFE (Polytetrafluoroethylene)	2
4	Disc	Iron:0.7040 , EN-GJS-400-15 Nylon Coated	1
5	Seat	EPDM (Ethylene Propylene Diene Monomer)	1
6	Stop-Cover	Galvanized steel	1
7	Upper-Shaft	Stainless Steel, 416	1
8	Long-Bushing	PTFE (Polytetrafluoroethylene)	2
9	Lower-Shaft	Stainless Steel, 416	1
10*	Screw	Galvanized steel	2

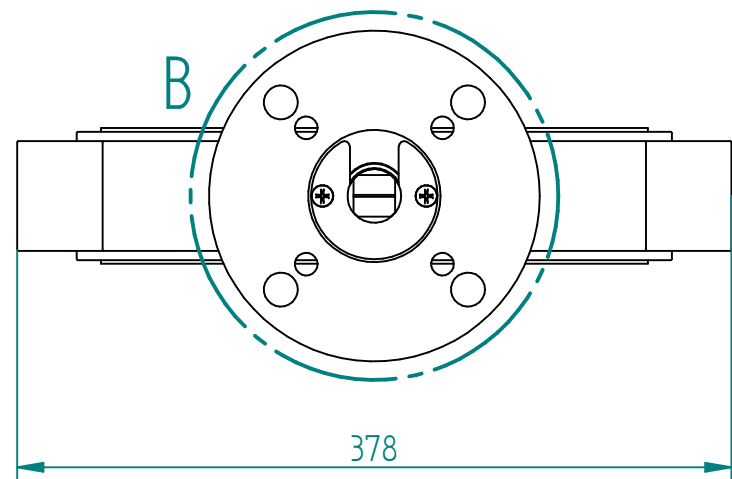

		NAME	DATE	SIZE	DWG NO		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE +/-0,5					
	DRAWN	HESG	4/28/2025	A3	QIF-110-011-0250B			03	2025 - Dimensions and materials review		28.04.2025	RAGA
	CHECKED	RESO	dd.mm.yyyy	FILE NAME: QIF-110-011-0250B.dft				REV	DESCRIPTION		DATE	APPROVED
TITLE	BF-VALVE DN250 PN10 LUG CONC. GGG40 C5-M/DI+NYL/SS416/EPDM F10/14 SQ22XH25 BARE SHAFT 350NM@10BAR - FOR ACTUATOR NOT GEAR	ENG APPR	TOCO	dd.mm.yyyy	SCALE: 1:4			REV: 03		REVISION HISTORY		
		MGR APPR	TOCO	dd.mm.yyyy	WEIGHT: 24 KG			SHEET: 1 OF 1				