


Item Number	Part Name	Material	Quantity
1	Seat	EPDM (Ethylene Propylene Diene Monomer)	1
2	Body	Iron:0.7040 , EN-GJS-400-15 C5-M Coated	1
3	Short-Bushing	PTFE (Polytetrafluoroethylene)	2
4	Long-Bushing	PTFE (Polytetrafluoroethylene)	2
5	O-RING	NBR (Nitrile Butadiene Rubber)	1
6	Disc	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
7	Stem-Top	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
8	Stop-Cover	Galvanized steel	1
9	Stem-Bottom	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
10*	Screw	Galvanized steel	2

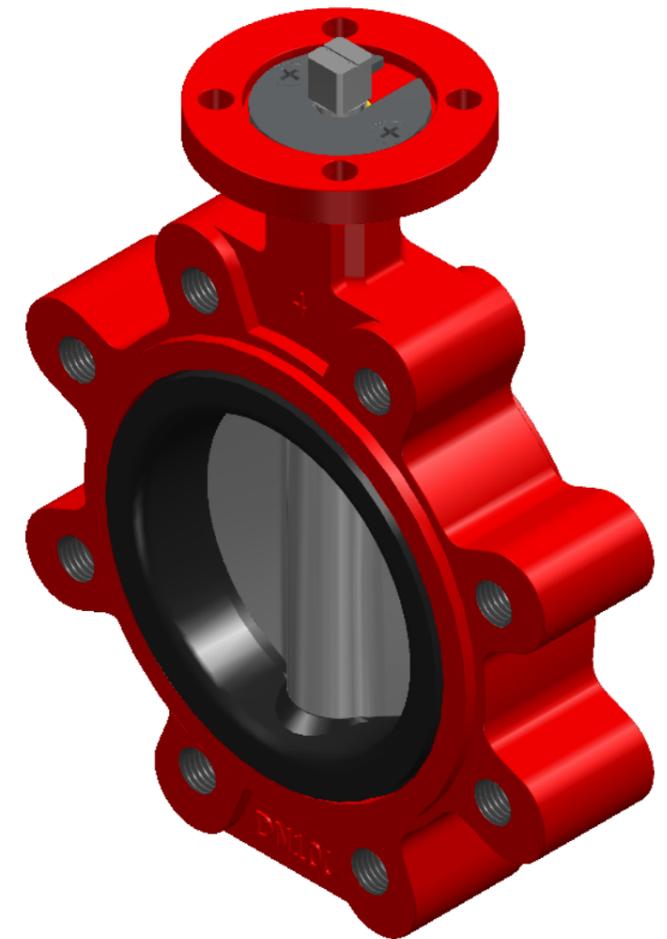

 <b>J.S. COCK</b> $\frac{A}{5}$	NAME	RAGA	DATE	10.10.2024	SIZE	A3	DWG NO	QIF-110-012-0100	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE +/-0,5	REVISION HISTORY		
	DRAWN	RAGA	10.10.2024	FILE NAME:	QIF-110-012-0100.dft			02		Materials updated	15.10.2025	RAGA
	CHECKED	TOCO	dd.mm.yyyy	SCALE:	1:2	REV:	02	REV		DESCRIPTION	DATE	APPROVED
	ENG APPR	TOCO	dd.mm.yyyy	WEIGHT:	6.3 kg	SHEET:	1 OF 1					
TITLE	BF-VALVE DUPLEX DN100 16BAR PN10/16 LUG CONC. GGG40/DPLX2205/DPLX2205/EPDM SQ14X15-F07 BARE SHAFT C5-M COATING 51NM@16BAR											