
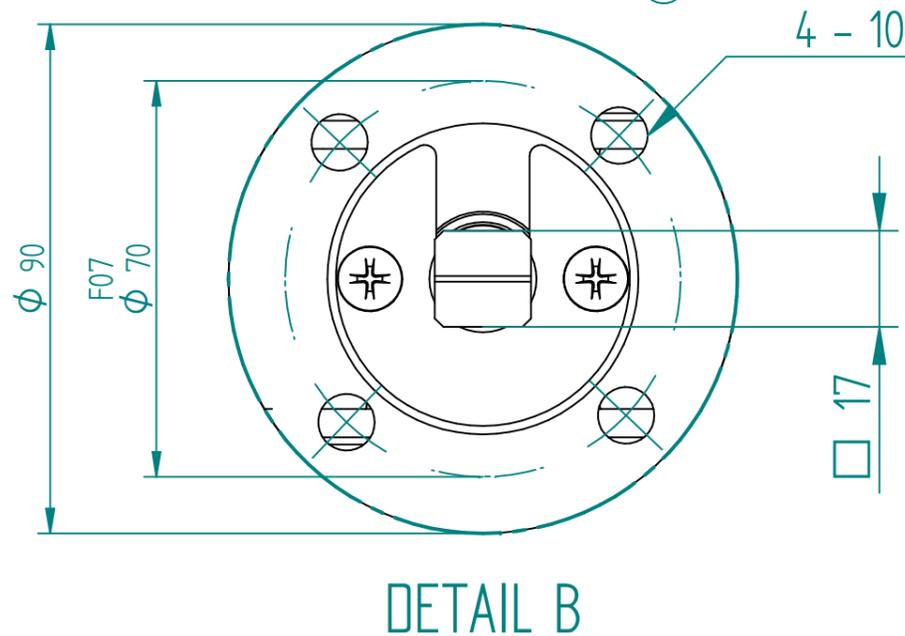
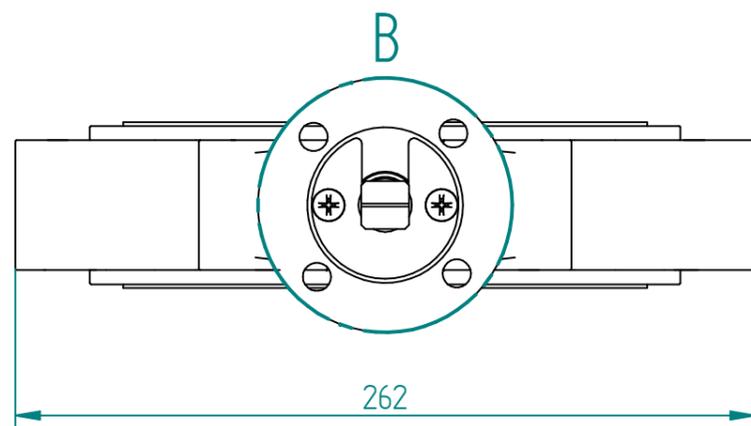


Item Number	Part Name	Material	Quantity
1	Seat	EPDM (Ethylene Propylene Diene Monomer)	1
2	Body	Iron:0.7040 , EN-GJS-400-15 C5-M Coated	1
3	Disc	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
4	Stem-Top	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
5	Long-Bushing	PTFE (Polytetrafluoroethylene)	2
6	Short-Bushing	PTFE (Polytetrafluoroethylene)	2
7	O-Ring	NBR (Nitrile Butadiene Rubber)	1
8	Stop-Cover	Galvanized steel	1
9	Stem-Bottom	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
10*	Screw	Galvanized steel	2

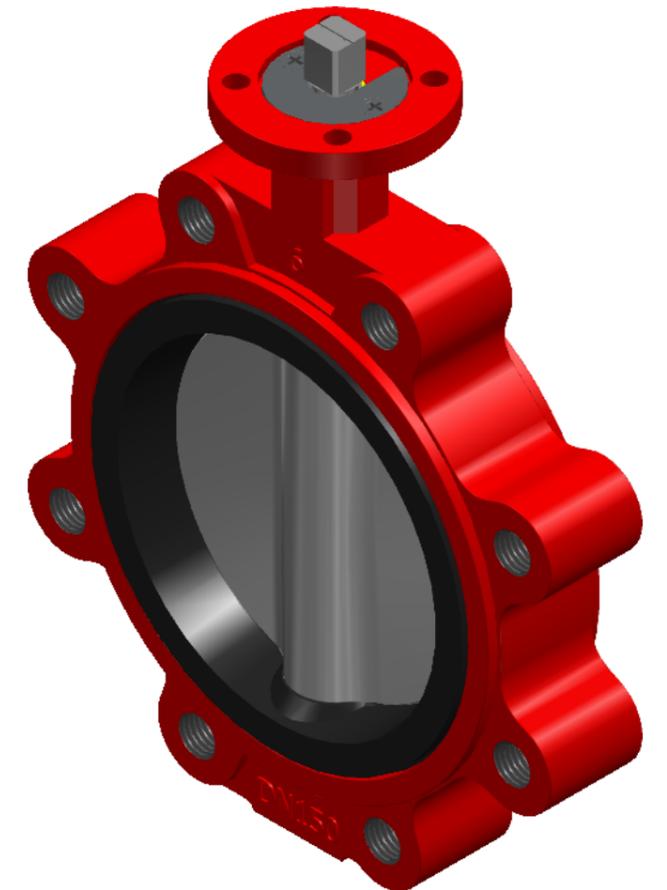

TITLE BF-VALVE DUPLEX DN150 16BAR PN10/16 LUG
 CONC. GGG40/DPLX2205/DPLX2205/EPDM SQ17X20-F07
 BARE SHAFT C5-M COATING 110NM@16BAR

	NAME	DATE	SIZE	DWG NO
DRAWN	RAGA	10.10.2024	A3	QIF-110-012-0150
CHECKED	TOCO	dd.mm.yyyy	FILE NAME: QIF-110-012-0150.dft	
ENG APPR	TOCO	dd.mm.yyyy	SCALE: 1:2.5	REV: 01
MGR APPR	TOCO	dd.mm.yyyy	WEIGHT: 10 kg	SHEET: 1 OF 1

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN MILLIMETERS
 AND TOLERANCES ARE +/-0,5

REV	DESCRIPTION	DATE	APPROVED
01	Materials Update	15.10.2025	RAGA
REVISION HISTORY			