


Item Number	Part Name	Material	Quantity
1	Short-Bushing	PTFE (Polytetrafluoroethylene)	2
2	Body	Iron:0.7040 , EN-GJS-400-15 C5-M Coated	1
3	Long-Bushing	PTFE (Polytetrafluoroethylene)	2
4	O-Ring	NBR (Nitrile Butadiene Rubber)	1
5	Seat	EPDM (Ethylene Propylene Diene Monomer)	1
6	Disc	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
7	Upper-Shaft	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
8	Stop-Cover	Galvanized steel	1
9	Lower-Shaft	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
10*	Screw	Galvanized steel	2

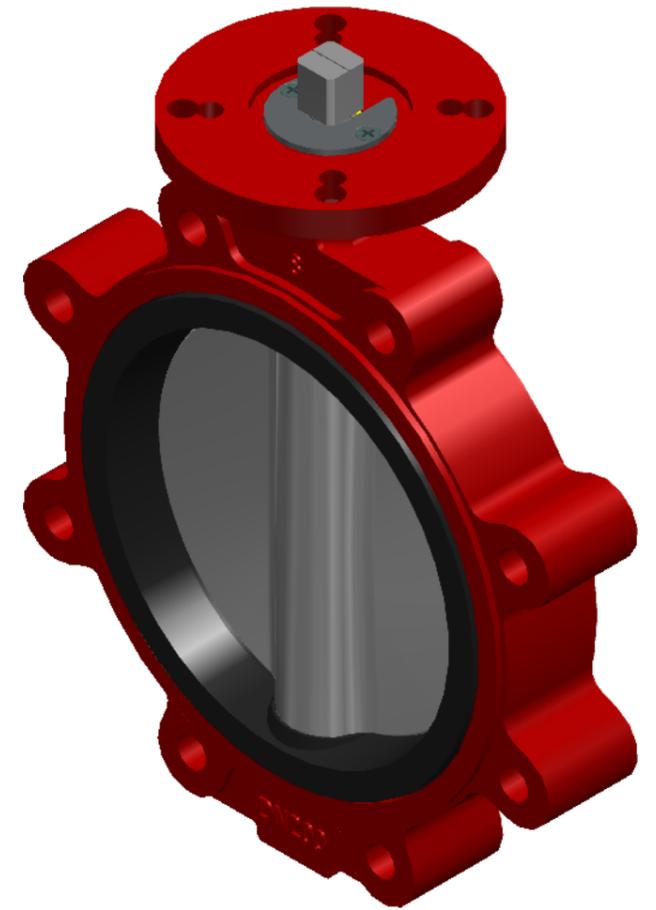

TITLE BF-VALVE DUPLEX DN200 10BAR PN10 LUG  
 CONC. GGG40/DPLX2205/DPLX2205/EPDM SQ22X25-F10/12  
 BARE SHAFT C5-M COATING 175NM@10BAR

	NAME	DATE	SIZE	DWG NO
DRAWN	RAGA	10.10.2024	A3	QIF-110-012-0200
CHECKED	TOCO	dd.mm.yyyy	FILE NAME: QIF-110-012-0200.dft	
ENG APPR	TOCO	dd.mm.yyyy	SCALE: 1:3	REV: 01
MGR APPR	TOCO	dd.mm.yyyy	WEIGHT: 16.5 kg	SHEET: 1 OF 1

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN MILLIMETERS  
 AND TOLERANCES ARE +/-0,5

REV	DESCRIPTION	DATE	APPROVED
01	Material Update	15.10.2025	RAGA
REVISION HISTORY			