

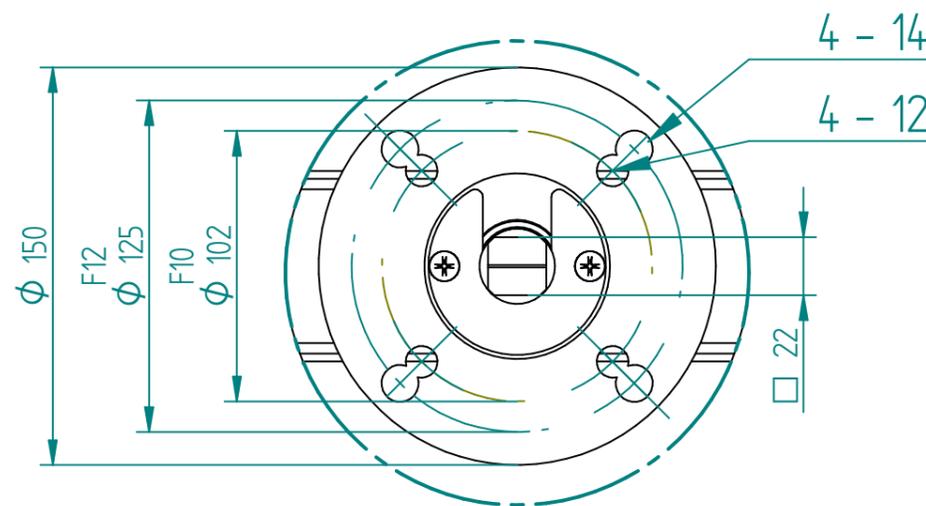


SECTION A-A

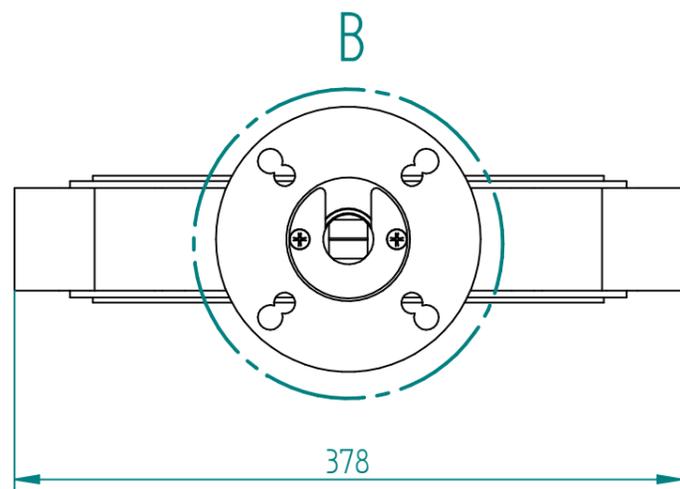

DETAIL B

Item Number	Part Name	Material	Quantity
1	Body	Iron:0.7040 , EN-GJS-400-15 C5-M Coated	1
2	O-Ring	NBR (Nitrile Butadiene Rubber)	1
3	Short-Bushing	PTFE (Polytetrafluoroethylene)	2
4	Disc	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
5	Seat	EPDM (Ethylene Propylene Diene Monomer)	1
6	Stop-Cover	Galvanized steel	1
7	Upper-Shaft	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
8	Long-Bushing	PTFE (Polytetrafluoroethylene)	2
9	Lower-Shaft	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
10*	Screw	Galvanized steel	2

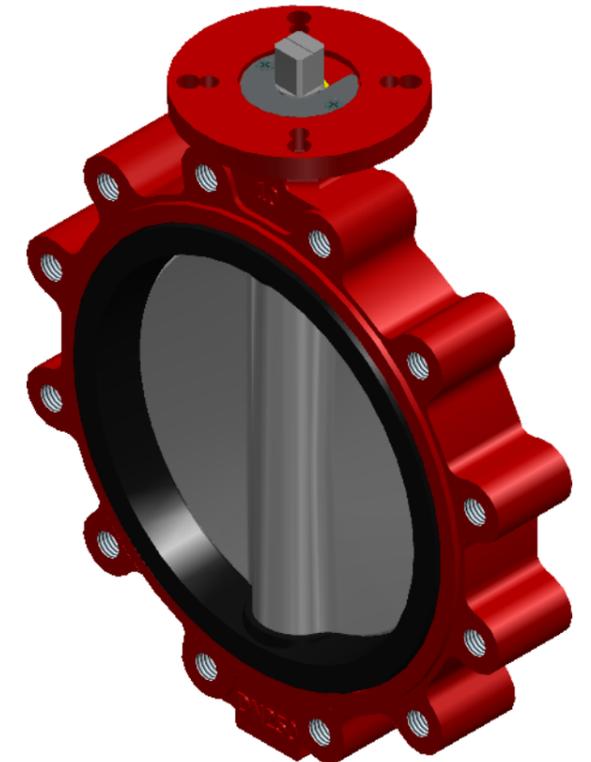

TITLE BF-VALVE DUPLEX DN250 PN10 LUG
 CONC. GGG40/DPLX2205/DPLX2205/EPDM F10/12 SQ22X25
 BARE SHAFT 356NM@10BAR

	NAME	DATE	SIZE	DWG NO
DRAWN	RAGA	10.10.2024	A3	QIF-110-012-0250
CHECKED	TOCO	dd.mm.yyyy	FILE NAME: QIF-110-012-0250.dft	
ENG APPR	TOCO	dd.mm.yyyy	SCALE: 1:4	REV: 02
MGR APPR	TOCO	dd.mm.yyyy	WEIGHT: 24 kg	SHEET: 1 OF 1

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN MILLIMETERS
 AND TOLERANCES ARE +/-0,5

REV	DESCRIPTION	DATE	APPROVED
02	Material Updated	15.10.2025	RAGA
REVISION HISTORY			