
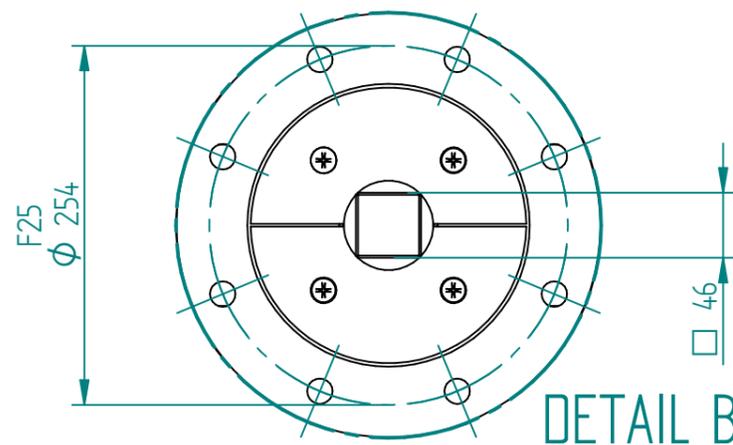


Item Number	Part Name	Material	Quantity
1	End-Cap-Washer	Galvanized steel	1
2	End-Cap-Lock-Washer	Galvanized steel	1
3	End-Cap-Screw	Galvanized steel	1
4	O-Ring-Bottom	NBR (Nitrile Butadiene Rubber)	1
5	End-Cap	Iron:0.7040 , EN-GJS-400-15 C5-M Coated	1
6	Ball-Bearing	Steel	1
7	Top-Shaft	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
8*	Stop-Cover-Screw	Galvanized steel	1
9	Stop-Cover	Galvanized steel	1
10	O-Ring	NBR (Nitrile Butadiene Rubber)	1
11	Body	Iron:0.7040 , EN-GJS-400-15 C5-M Coated	1
12	Seat	EPDM (Ethylene Propylene Diene Monomer)	1
13	Disc	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
14	Bottom-Stem	Steel - Stainless:1.4462 , X2CrNiMoN22-5-3	1
15	Long-Bushing	PTFE (Polytetrafluoroethylene)	2
16	Short-Bushing	PTFE (Polytetrafluoroethylene)	2

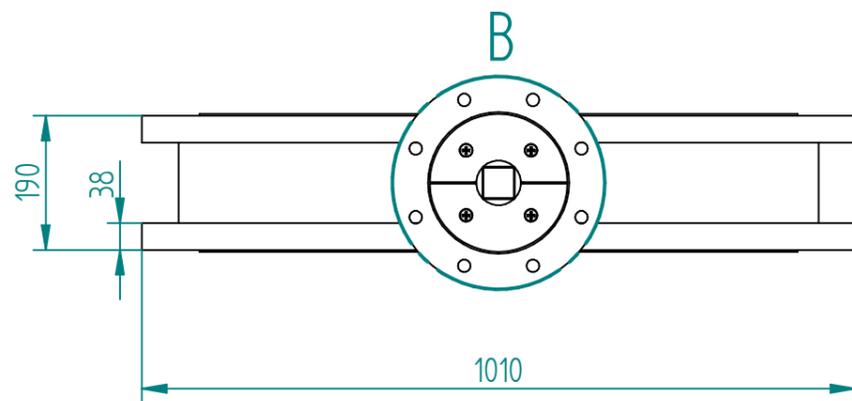

	NAME	DATE	SIZE	DWG NO	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE +/-0,5
	DRAWN	RAGA	11.10.2024	A3 QIF-110-012-0800	
	CHECKED	TOCO	dd.mm.yyyy	FILE NAME: QIF-110-012-0800.dft	
	ENG APPR	TOCO	dd.mm.yyyy	SCALE: 1:10 REV: 01	
MGR APPR	TOCO	dd.mm.yyyy	WEIGHT: 400 kg	SHEET: 1 OF 1	

TITLE BF-VALVE DUPLEX DN800 PN10 LUG
 CONC. GGG40/DPLX2205/DPLX2205/EPDM F25 SQ46X66
 BARE SHAFT 6612NM@10BAR 5086NM@6BAR

REV	DESCRIPTION	DATE	APPROVED
01	Materials and dimensions updated	16.10.2025	RAGA
REVISION HISTORY			