




Hard Graphite Seat

High temperatures
High performance

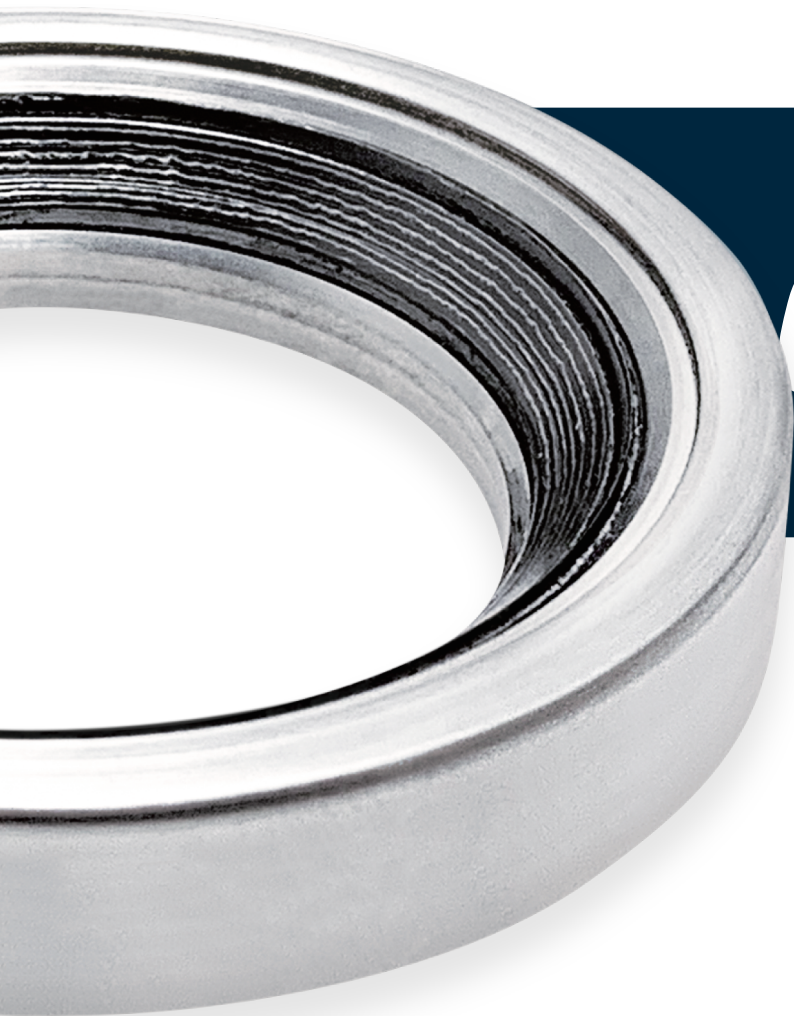


SS 316 + Graphite Seat


Unidirectional ball valve / Recommended for low abrasion application

Specification	
Body material	Standard in WCB, CF8M (Special material is available according to application)
Nominal size	1/4" to 4"
End connections	Thread / Socket Weld / Butt Weld / Flanged
Temperature range	-60 °C to 450 °C
Body pressure testing	EN 12266-1 / API 598
Seat leakage testing	EN 12266-1 Rate A

Design and Structure

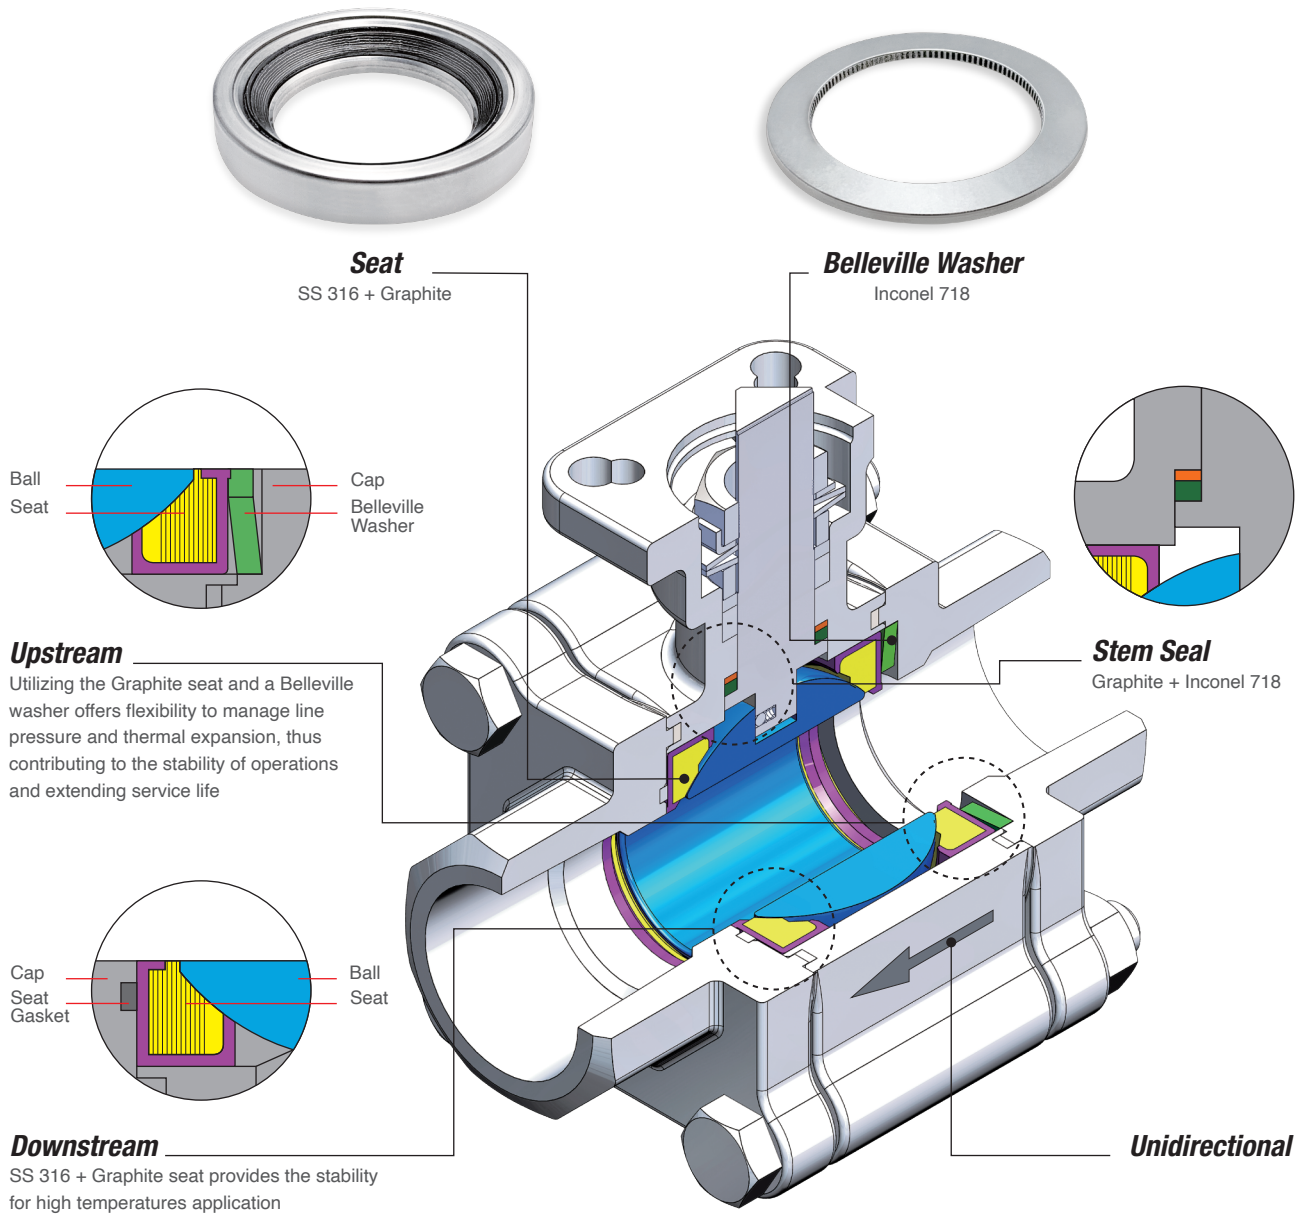

Pressure vs. Temperature Chart

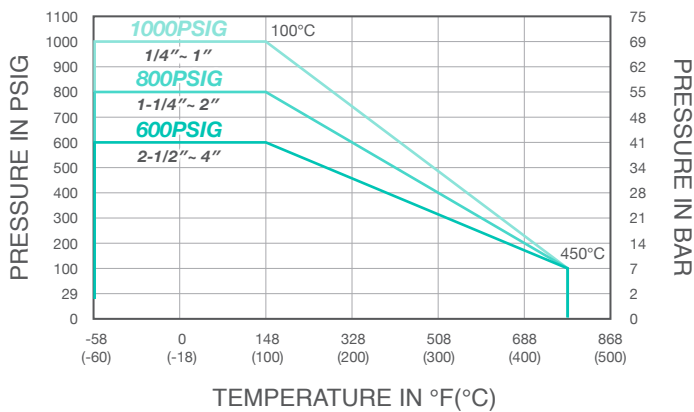

Caution

- Do not use for throttling application
- Do not use for high abrasion application
- Do not use for food / sanitary application