
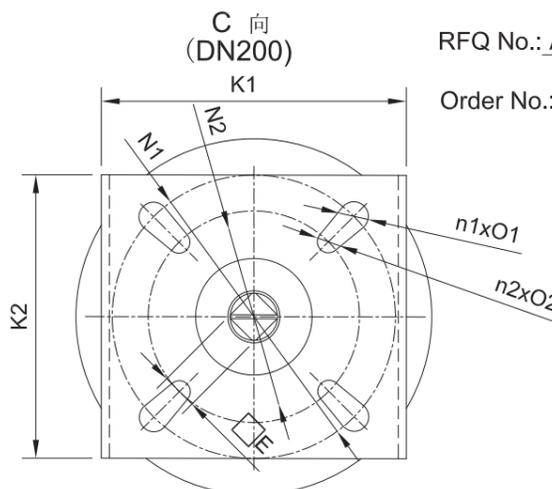
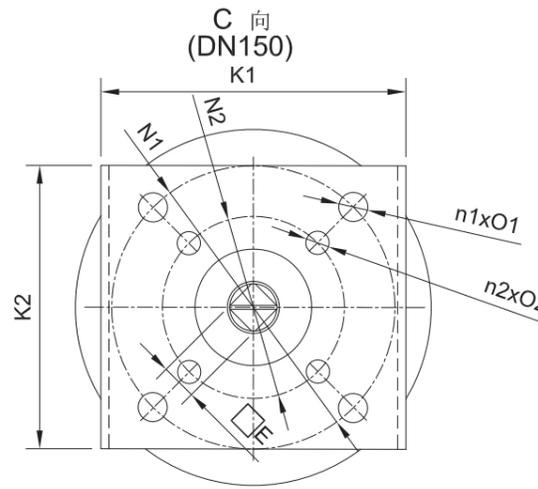
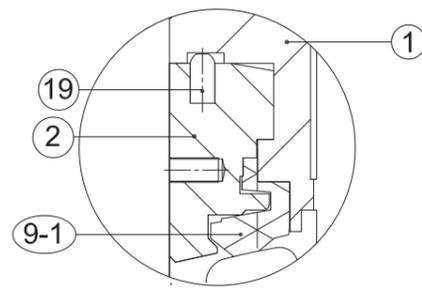
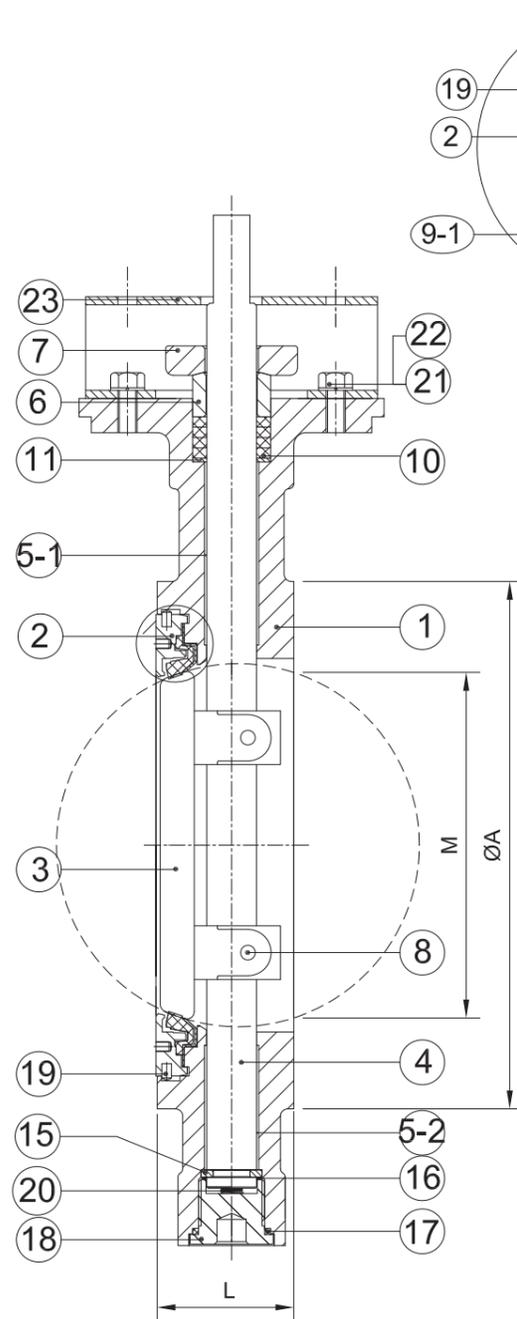


SOFT SEAT

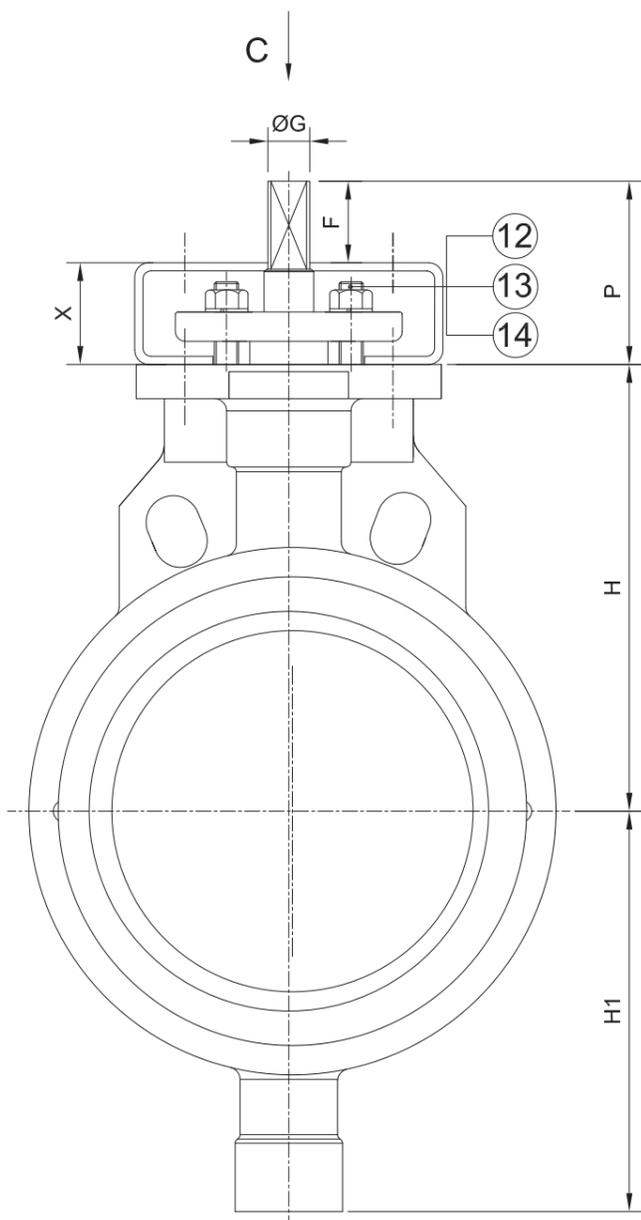

- Technical Specification:
- 1.Valve: High Performance Butterfly
  - 2.Design STD: EN593
  - 3.Face to Face: Client Offer
  - 4.Flange Connection: EN1092-1(PN16)
  - 5.Top Flange: ISO5211
  - 6.Max.W.P.(Bar): 16bar
  - 7.W.T.Range(°C) : RPTFE(-40~230°C)
  - 8.Test STD: EN12266-1

RFQ No.: AFFCOV-186198-J.S.COCK

Order No.:

23	1	Bracket	S32750		
22	4	Spring Washer	S32750		
21	4	Bolt	S32750		
20	1	Anti-Static Spring	Inconel X-750		
19	2	Stop Pin	S32750		
18	1	Bottom Plug	Gr.5A		
17	1	Packing Ring	GRAPHITE		
16	3	Distance Ring	S32750		
15	1	Lock Ring	S32750		
14	2	Nut	S32750		
13	2	Spring Washer	S32750		
12	2	Stud	S32750		
11	1	Packing Rester	S32750		
10	4	Packing	GRAPHITE		
9-1	1	Soft Seat	RPTFE		
8	2	Taper Pin	S32750		
7	1	Packing Gland	Gr.5A		
6	1	Packing Sleeve	S32750		
5-2	1	Bearing Bush(Down)	S32750+RPTFE		
5-1	1	Bearing Bush(Up)	S32750+RPTFE		
4	1	Shaft	F53		ASTM A182
3	1	Disc	Gr.5A		ASTM A890
2	1	Seat Ring	Gr.5A		ASTM A890
1	1	Body	Gr.5A		ASTM A890
0	0	Assembly	0		

DN	ØA	ØG	E	F	H	H1	K1	K2	L	N1	n1xØ1	P	X	M	N2	n2xØ2
150	216	19	13	32	183	164	110	100	57	102	4xØ11	77	(45)	138.39	70	4xØ9.6
200	268	22	16	32	218	195	140	120	61	125	4xØ13.5	92	(60)	189.79	102	4xØ11

POS.No.	ITEM	QTY	PART NAME	MATERIAL	SIZE/DWG.No.	REMARKS/STD.
03					DRWN. BY :L.W	DATE :03-03-'26
02					CHKD. BY :M.W	DATE :03-03-'26
01					APPR. BY :S.C	DATE :03-03-'26
00					SCALE :	AM.PROJ.
ISSUE	DATE	SIGN.	DESCRIPTION	APPR. DATE	CHKD.	SURFACE ROUGHNESS ACCORDING TO ISO-1302
						REV.00



ASTM A182  
ASTM A890  
ASTM A890  
ASTM A890